



ABOUTBLU/REGULAR

**ASEPTIC & FOOD** 

## **ITALIA**


19267 00-A

S2 SRC UNI EN ISO 20345:2012

UPPER	washable, elastic, breathable and water-repellent, microfiber. Resistant to laceration, traction and chemical agents
LINING	Antibacterial
INSOLE	<b>AIR BIENCE</b> Thermoformed. Runresistant, multi-layered, antistatic latex-foam fabric, that is antibacterial, breathable and absorbent with anti-fungus activated carbons. Extractable. The sanitized treatment ensures the ati-bacterial aspect and the control of unpleasant odors.
SOLE	PU/PU DUAL DENSITY BASF PUR Elastopan® polyurethane foam insole, ensures the maximum comfort and the absorption of the impact on all surfaces. Polyurethane outsole, with an elevated grip, resistant to wear, oils and hydrocarbons. System of energy absorption on the heel. It leaves no mark on the surface. SATRA UK "Pedatron Test" that certifies abrasion resistance three times greater than standard
TOE CAP	The <b>POWER CAP</b> is in multilayer fiberglass and rubber particulate. It stands out for its robustness and lightness, guaranteeing a shock absorption up to a max. 200 Joules.Being metal-free is is undetactable by a meta detector, and helps to maintain a constant body temperature. It provides maxmum safety even at extreme temperatures above and below zero, providing a thermal insulation that is better than aluminum or steel toe-caps. It is compliant with CSA Canada regulations and exceeds the EN-ISO12568 requirements.
ANTI-TORSION SUPPORT	COMPOSHANK Anti-torsion support in ABS. It is applied between the antiperforation midsole and the midsole, corresponding to the arch of the foot. It improves stability on ledden where foot support is to applied to the arch of the foot.

ladders, where foot support is not complete.

**SIZE** 35-48

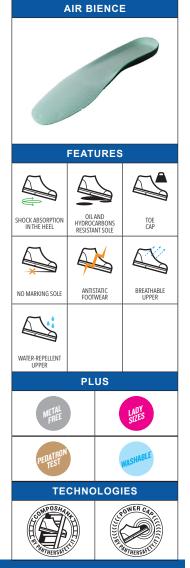



WEIGHT SIZE 42 450 gr